

# Vexve AMV4

## 4- way brass distribution and mixing valves

### Material

Body/Runko:	DZR Brass
Slide/Suljin:	DZR Brass
Cover/Kansi:	Fortron
Handle/Kahva:	POM
O-rings/O-renkaat:	EPDM


### Features

Rotation angle/Käännöskulma:	90-degrees
Leakage rate/Tiiveysluokka:	> 0,1%, 2 bar / 90 C
Torque/Vääntömomentti:	> 3 Nm
Flow media/Väliaine:	Water, glycol
Max operating pressure/ Maksimi työpaine:	10 bar
Motorising/Motorisointi:	As standard
Flow direction/Käitsyys:	Can be changed without tools - also when pressurised
Max. closing pressure/ Max. sulkupaine:	4 bar
Maintenance/Huolto:	Maintenance free




### Operating conditions

Temperature:	-10°C - +120 °C
--------------	-----------------

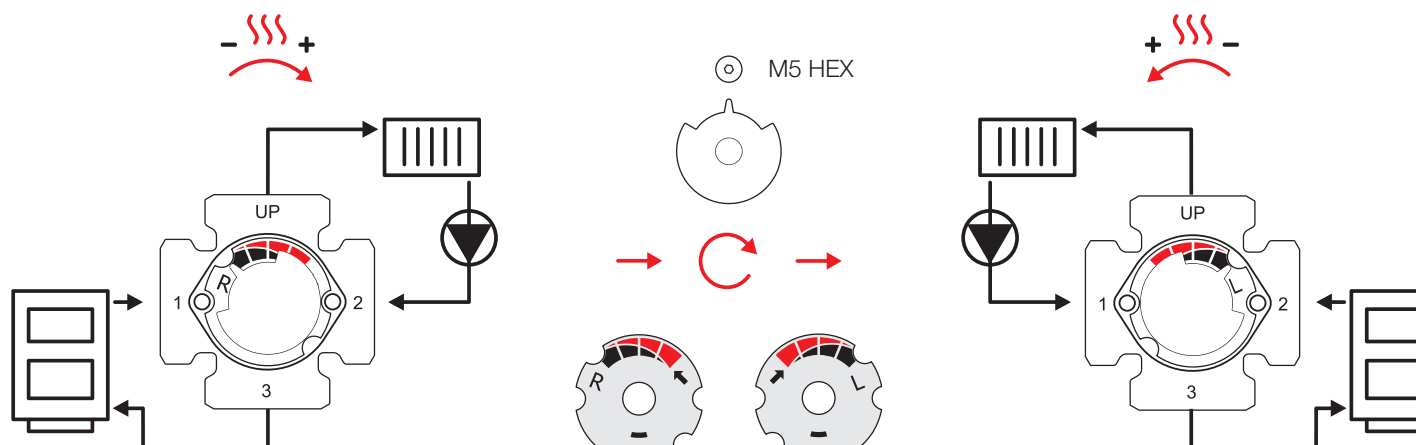

# Vexve AMV4

4- way brass distribution and mixing valves

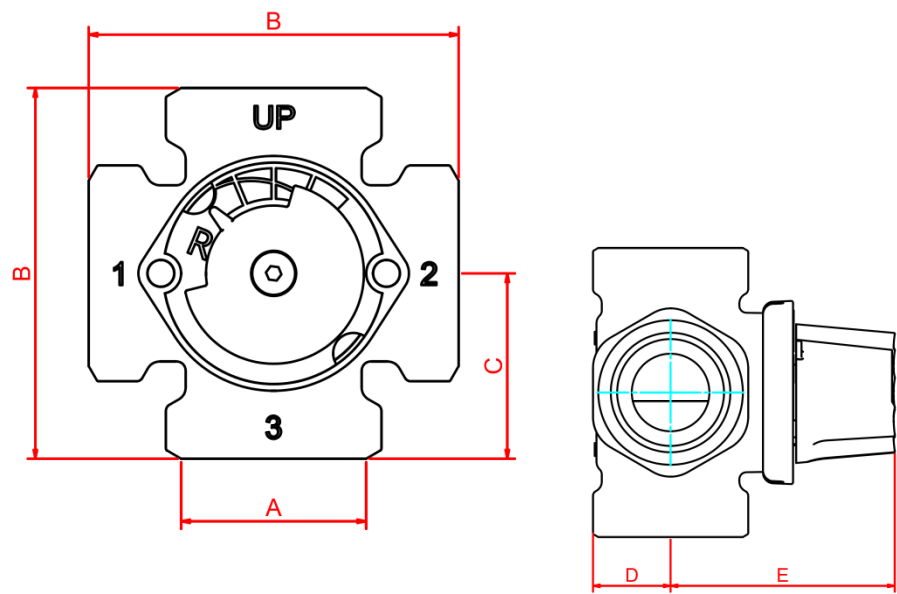

Item	Product No	EAN	LVI	DN	Kv	A	B mm	C mm	D mm	E mm	F mm	Kg
Vexve AMV 4101	154 0005	6415840231912	4023191	15	2,5	Rp1/2"	72	36	17	60	60	0,52
Vexve AMV 4111	154 0010	6415840231929	4023192	20	4,0	Rp3/4"	72	36	18	60	60	0,62
Vexve AMV 4112	154 0015	6415840231936	4023193	20	6,3	Rp3/4"	72	36	18	60	60	0,60
Vexve AMV 4121	154 0020	6415840231943	4023194	25	8,0	Rp1"	82	41	22	64	64	1,00
Vexve AMV 4122	154 0025	6415840231950	4023195	25	12,3	Rp1"	82	41	22	64	64	0,98
Vexve AMV 4131	154 0030	6415840231967	4023196	32	15,0	Rp1 1/4"	94	47	25	64	64	1,15

Vexve can accept no responsibility for possible errors in catalogues, brochures and other printed material. All trademarks in this material are property of the respective companies. All rights reserved.